

# CLP-825 Firmware Update Guide

---

## ■ Items necessary for updating

- Computer or smart device (tablet/smart phone)
- Firmware file "CLP-825SETUP.PRG"
  - \* Unzip "CLP-825\_main.zip" and save it to the computer or smart device.
- USB cable (Type A - Type B)
  - \* Depending on the computer or smart device to be connected, a USB conversion adaptor may also be necessary.


## ■ Updating the firmware

### NOTICE

Do not turn off the instrument during the update.

1. Make sure that the power of the instrument is turned off.
2. While holding down the [PLAY] button, turn on the instrument.


The [REC] lamp flashes.

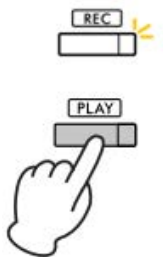

3. Connect the computer or smart device containing the firmware file to the [USB TO HOST] terminal of the instrument by using a USB cable.

The instrument is recognized as an external storage device by the computer or smart device.

4. Copy the firmware file from the computer or smart device to the instrument (CLP-825).

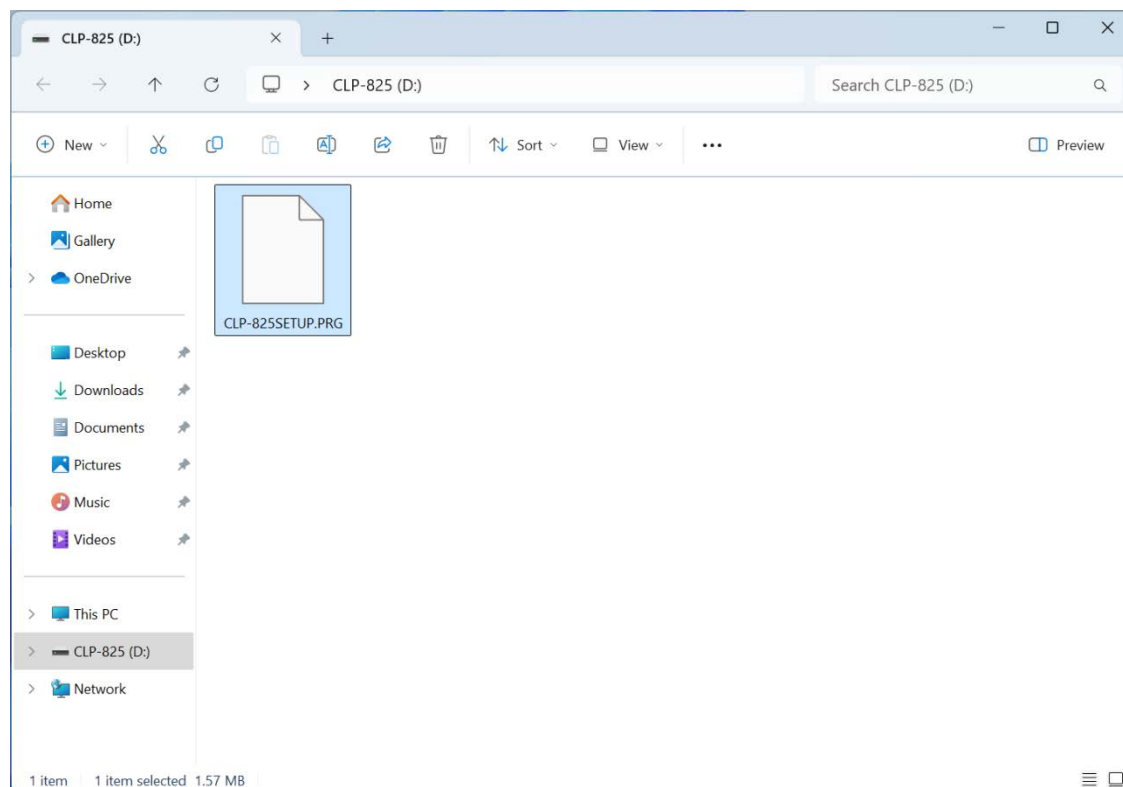

### NOTE

On an iOS or iPadOS device, touch and hold "CLP-825SETUP.PRГ" file in the "Files" app, and then select "Move." After that, select "CLP-825" as the destination, and then tap "Copy."

On an Android device, touch and hold "CLP-825SETUP.PRG" file in the "Files" app, and then select "Copy." After that, select "Clavinova" as the destination, and then tap "Copy here."

**5. Disconnect the USB cable.**

The [PLAY] lamp lights up.



**6. Press the [PLAY] button to start updating.**

**7. When the [REC] lamp lights up, turn off the power of the instrument.**



The firmware update is now complete.

If the [REC] lamp flashes, it means the firmware update failed. In this case, go back to the first step, and then follow all steps to the finish again.

## ■ Confirming the firmware version of the instrument

**1. Turn on the power of the instrument.**

**2. While holding down the [DEMO/SONG] and [PIANO/VOICE] buttons simultaneously, press the B0 key.**

The current version of the instrument is announced in English.

